

PLEXIGLAS®
BY ARKEMA

Plexiglas® Clear-Edge Frosted

ACRYLIC SHEET

Bring a designer edge to retail sales.

Designed in response to the growing demand for matte finish looks, Plexiglas® Clear-Edge Frosted acrylic sheet consists of a middle (transparent) layer sandwiched between thin top and bottom frosted surface layers. Attractive and sleek, the sheet is available in a one- or two-sided frosted surface with a transparent colorless or colored edge to buff or bevel.


The frosted layers maintain all of the attributes associated with our Plexiglas® Frosted acrylic sheet.

- Effectively diffuses light
- Hides fingerprints and scratches
- Requires less cleaning and maintenance
- Easily thermoformable
- Easy to cut, drill, rout, finish and cement
- Patented technology – this product is within the scope of one or more claims of US patent 7,067,188

Plexiglas® Clear-Edge Frosted

ACRYLIC SHEET

Plexiglas® Clear-Edge Frosted acrylic sheet is an excellent choice for designers looking to create attractive lighting, shelving, tabletop, backdrop and point-of-purchase displays. Outstanding for retail and merchandising environments, the sheet is available in clear, colors and pastels.

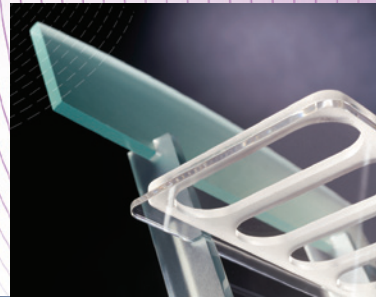

PROPERTIES	TEST METHOD	UNIT	VALUE
Physical			
Nominal Thickness for data unless otherwise noted		in	0.236"
Specific Gravity	ASTM D-792	---	1.18
Rockwell Hardness	ASTM D-785	M scale	95
Optical			
Refractive Index (ND @ 73°F)	ASTM D-542	---	1.49
Luminous Transmittance ¹	ASTM D-1003	%	85
Mechanical			
Tensile Strength, maximum	ASTM D-638	psi	10,200
Tensile Elongation	ASTM D-638	%	4.5
Tensile Modulus of Elasticity	ASTM D-638	psi	450,000
Flexural Strength, maximum	ASTM D-790	psi	15,000
Flexural Modulus of Elasticity	ASTM D-790	psi	450,000
Notched Izod impact @ 73°F (23°C)	ASTM D-256	ft-lb / in	0.3
Thermal			
Maximum Recommended Continuous Service Temperature	N/A	°F	170 – 190
Recommended Thermoforming Temperature	N/A	°F	275 – 350
Flammability² & Specification Compliance			
Self Ignition Temperature	ASTM D-1929	°F	850
Standard Specification for PMMA Acrylic Plastic Sheet	ASTM D-4802	---	Category B-1, Finish 2

Data given are average values and should not be used for specification purposes.

1. This property will change with thickness. The value given is for the thickness indicated in the column heading unless otherwise noted.
2. Flammability tests are small scale tests and may not be indicative of how materials will perform in an actual situation.

THICKNESS
0.118"
0.177"
0.236"
0.354"
0.472"

SHEET SIZE*
48" x 96"

All thicknesses available in all sheet sizes.
*Custom sizes are available with minimum requirements.

COLOR OFFERING*

COLORLESS	
GREEN	3030
BLUE	3120

*Standard colors require 1 pallet minimum. Other custom colors are available upon request. Pricing based on total amount of pounds requested.

Distributed by:

 **Polymershapes**

Call: 1 (866) 437-7427
Email: info@polymershapes.com
www.polymershapes.com

Plexiglas® acrylic plastic is a combustible thermoplastic. Observe fire precautions appropriate for comparable forms of wood and paper. For building uses, check code approvals. Impact resistance is a factor of thickness. Avoid exposure to heat or aromatic solvents. Clean with soap and water. Avoid abrasives.

The statements, technical information and recommendations contained herein are believed to be accurate as of the date hereof. Since the conditions and methods of use of the product and of the information referred to herein are beyond our control, Arkema expressly disclaims any and all liability as to any results obtained or arising from any use of the product or reliance on such information. NO WARRANTY OF FITNESS FOR ANY PARTICULAR PURPOSE, WARRANTY OF MERCHANTABILITY OR ANY OTHER WARRANTY, EXPRESS OR IMPLIED, IS MADE CONCERNING THE GOODS DESCRIBED OR THE INFORMATION PROVIDED HEREIN. The information provided herein relates only to the specific product designated and may not be applicable when such product is used in combination with other materials or in any process. The user should thoroughly test any application before commercialization. Nothing contained herein constitutes a license to practice under any patent and it should not be construed as an inducement to infringe any patent and the user is advised to take appropriate steps to be sure that any proposed use of the product will not result in patent infringement.

See MSDS for Health & Safety Considerations.
Altuglas® and Plexiglas® are registered trademarks of Arkema.
©2013 Arkema Inc. All rights reserved.