




Wet Process Solutions

Global leader in providing ultrapure semi-finished rod, sheet, & tube solutions for every need in the semiconductor industry

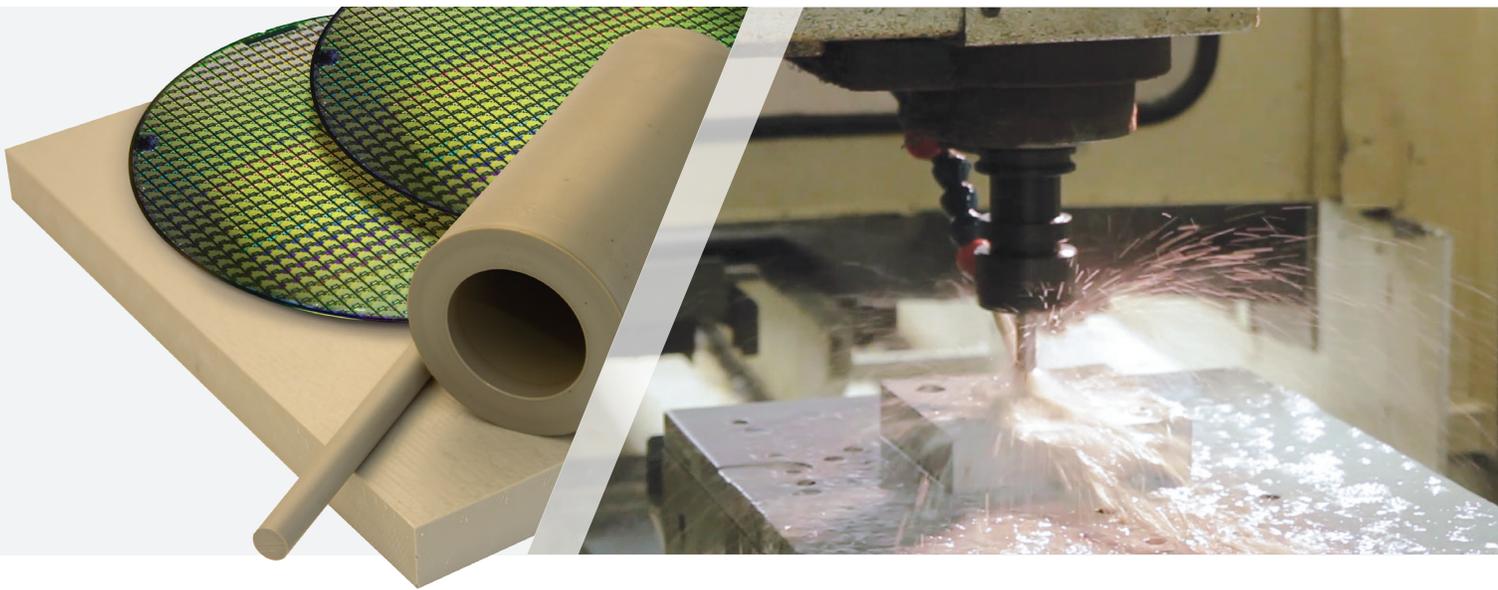

Typical Process Tools: FEOL Clean, BEOL Clean, PVD, Sputtering, Plating Tools & Wet Bench

		Wafer Handling & Components	Structural & Chamber
Wet Process Materials	Proteus® PP		✓
	Semitron® PP	✓	✓
	Ertalyte® PET-P	✓	✓
	Ketron® 1000 PEEK	✓	
	1000 PMP	✓	✓
	Ketron® CA30 PEEK	✓	✓
	Techtron® PPS	✓	✓



Wafer Handling & Component Features

Key Considerations

- Corrosion resistance
- Flatness
- Strength & wear
- Purity
- Chemical resistance
- Dimensional strength

Material	Relative Dimensional Stability	HDT 264 psi	Appearance	Available Shapes
Proteus® PP	+	210	dense white	
Semitron® PP	+++	210	white	
1000 PMP	++	155	transparent	
Ertalyte® PET-P	++++	240	dense white	  
Techtron® PPS	+++++	250	beige	  
Ketron® CA30 PEEK	+++++	518	black	  
Ketron® 1000 PEEK	+++++	320	tan	  

 rod
  sheet
  tube



Typical Applications

- Spin discs & chucks
- Wafer motion gears
- Shower heads
- Wafer grabbers
- Pins & screws

Functional Chemical Compatibility

	1000 PMP	Semitron® PP	Ketron® 1000 PEEK	Techtron® PPS	Ketron® CA30 PEEK	Ertalyte® PET-P	
Strong Acids	+	+	0	0	0	-	
Weak Acids	+	+	+	+	+	+	
Strong Base	+	+	+	+	+	+	
Weak Base	+	+	+	+	+	0	
Salts	+	+	+	+	+	+	
Halogens	0	0	+	0	+	0	
Solvents	Aliphatic hydrocarbon	-	+	+	+	+	
	Aromatic hydrocarbon	0	0	+	+	+	
	Chlorinated hydrocarbon	-	-	0	+	+	0
	Ketones	-	+	+	+	+	+
	Amines	+	+	+	+	+	+
	Alcohols	+	+	+	+	+	+
	Esters	-	+	+	+	+	+
	Aldehydes	+	+	+	+	+	+
Phenoles	0	0	+	-	+	-	

Tests @ 73°F

- Not Acceptable Service 0 Limited + Service Acceptable Service

Semitron® PP


Semitron® PP is polypropylene plate developed specifically for demanding Wet Process Semiconductor applications that requires a high level of dimensional stability.

Key Benefits

- Minimizes center line porosity common with thicker plates (2" & up)
- Delivers Ultra-Clean plate to minimize risk of surface contaminants
- Lowers overall cost by delivering lower stress plate


Minimal Center Line Porosity

- Mitsubishi Chemical Advanced Materials has developed proprietary processing methods to minimize the high stress & center line porosity that is common with standard polypropylene
- The plates, ranging from 2" to 5" thickness are manufactured to the highest standards for use in the Semiconductor Wet Process Industry

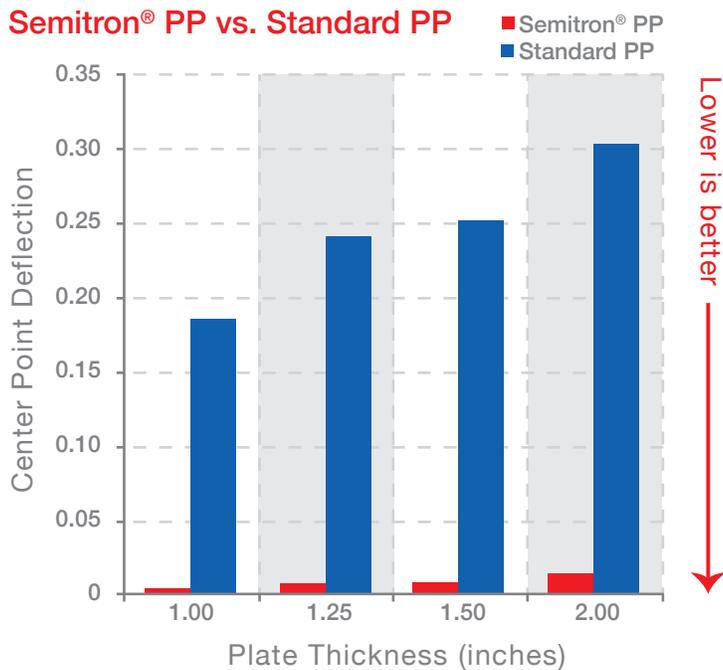

Lower internal stress allows for accelerated fabrication cycles through faster speeds & feeds as well as reducing or eliminating the need to anneal.

Semitron® PP Plate

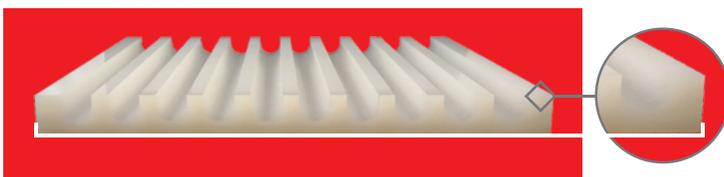

Standard PP Plate



Material Comparison Guide

			Proteus® PP	Semitron® PP	Ertalyte® PET-P	1000 PMP	Techtron® PPS	Ketron® 1000 PEEK
Mechanical Properties	Specific Gravity	D792	0.91	0.92	1.41	0.83	1.35	1.35
	Tensile Modulus (psi)	D638	190,000	150,000	460,000	240,000	500,000	63,000
	Flexural Modulus (psi)	D790	195,000	185,000	490,000	195,000	575,000	600,000
	Tensile Elongation (%)	D638	14	8	20	50	15	40
	CLTE (in./in./°F X 10 ⁻⁵)	E-831 (TMA)	-	6.0	3.3	6.5	2.8	2.6
	Hardness Rockwell	D785	-	R113	M93	R83	M95	M100
	Moisture Absorption 24hrs @73°F (%)	D570	0.01	0.01	0.07	0.01	0.10	0.10
	Izod Notched	D256 Type "A"	1.2	1.0	0.5	0.5	0.6	0.6
Thermal Prop.	Heat Deflection Temperature @264psi (°F)	D648	205	> 300	240	155	250	320
	Continuous Service Temperature	-	180	180	210	300	425	480

Proteus® LF & Semitron® PP Sizes Available

		Thickness (in.)	Plate Size (mm)		Plate Size (in.)	
Proteus® LF	0.250	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	0.375	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	0.500	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	0.625	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	0.750	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	1.000	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	1.250	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	1.500	610 x 1220	1220 x 3050	24 x 48	48 x 120	
Semitron® PP	2.000	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	2.250	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	2.500	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	3.000	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	4.000	610 x 1220	1220 x 3050	24 x 48	48 x 120	
	5.000	610 x 1220	1220 x 3050	24 x 48	48 x 120	

Distributed by:



Email: info@polymershapes.com
 Call: 1 (866) 437-7427
www.polymershapes.com

All statements, technical information and recommendations contained in this publication are presented in good faith and are, as a rule, based upon tests and such tests are believed to be reliable and practical field experience. The reader, however, is cautioned, that Mitsubishi Chemical Advanced Materials does not guarantee the accuracy or completeness of this information and it is the customer's responsibility to determine the suitability of Mitsubishi Chemical Advanced Materials' products in any given application. Ertalyte, Ketron, Proteus, Semitron and Techtron are a registered trademarks of the Mitsubishi Chemical Advanced Materials group of companies.

Design and content created by Mitsubishi Chemical Advanced Materials and are protected by copyright law. Copyright © Mitsubishi Chemical Advanced Materials. All rights reserved. MCM NA 6I | 6.12.19

