




MECHETEC[®] NYLON



Polyamide (PA) Extruded Nylon 6/6

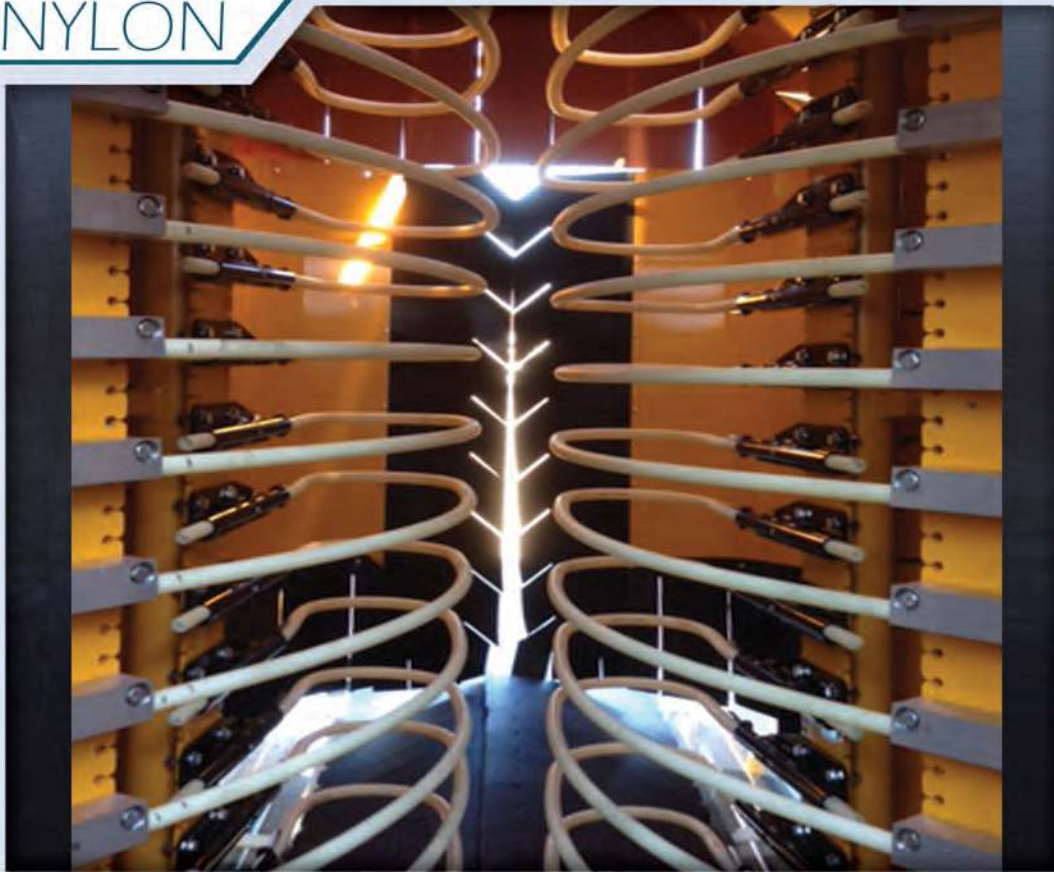

Excellent Wear Resistance



Light Weight

APPLICATIONS

Harvesting Rods
Rollers and Wheels
Pump Components
Sheaves and Pulleys
Gears and Sprockets
Bushings and Bearings

KEY FEATURES

210 °F Continuous Use Temperature
Excellent Toughness and Resiliency
Superior Abrasion Resistance
Good Chemical Resistance
High Strength and Stiffness

SHAPES AND SIZES

ROD DIAMETER

NATURAL	0.25" - 6.0"
BLACK	0.25" - 6.0"
Ld	0.25" - 4.0"
Rg-30	0.375" - 4.0"

SHEET THICKNESS

NATURAL	0.25" - 2.0"
BLACK	0.25" - 2.0"
Ld	0.25" - 2.0"
Rg-30	0.375" - 4.0"



MECHETEC®
NYLON

	Test Method	Units	NATURAL and BLACK Unfilled Nylon 6/6	NYLON Ld MoS ₂ Filled Nylon 6/6	NYLON Rg-30 30% Glass Filled Nylon 6/6
Mechanical					
Specific Gravity	ASTM-D792	—	1.14	1.16	1.33
Tensile Strength	ASTM-D638	psi	11,500	11,800	18,350
Tensile Elongation	ASTM-D638	%	60	50	4-6
Tensile Modulus of Elasticity	ASTM-D638	psi	410,000	500,000	1,200,000
Flexural Strength	ASTM-D790	psi	14,500	15,000	27,000
Flexural Modulus of Elasticity	ASTM-D790	psi	410,000	480,000	950,000
Compressive Strength	ASTM-D695	psi	13,000	16,000	20,000
Izod Notched Impact	ASTM-D256	ft.-lb./in.	0.6	0.5	2.3
Rockwell Hardness	ASTM-D785	M or R scale	M80(R121)	M85(R115)	M101
Thermal					
Coef. of Linear Thermal Expansion	ASTM-D696	in./in./deg F	5.0 x 10 ⁻⁵	4.0 x 10 ⁻⁵	1.2 x 10 ⁻⁵
Max. Continuous Use Temp.	Internal Std.	°F	210	210	210
Heat Deflection Temp. @ 264 psi	ASTM-D648	°F	200	210	460
Melting Point	ASTM-D3418	°F	504	495	504
Electrical					
Dielectric Strength-Short Term	ASTM-D149	volts/mil	400	350	530
Dielectric Constant @ 60 Hz	ASTM-D150	—	5	3.7	3.5
Dielectric Constant @ 106Hz	ASTM-D150	—	3.6	—	3.7
Dissipation Factor @ 60 Hz	ASTM-D150	—	0.01	—	0.014
Volume Resistivity	ASTM-D257	ohm-cm	10 ¹⁵	10 ¹³	10 ¹⁵
Miscellaneous					
Water Absorption/24 hrs.	ASTM-D570	% weight	1.2	0.7	0.7
Water Absorption @ Saturation	ASTM-D570	% weight	7.0	6.5	5.4
Flammability	UL-94	—	V-2	V-2	HB
Dynamic Coefficient of Friction	Internal Std.	—	0.25	0.23	0.31
Agency Compliance					
FDA	---	---	Yes	No	No
USDA	---	---	Yes	No	No
NSF	---	---	Yes	No	No

Other NYLON Specialties Available- MECHETEC im (Zytel ST801)
Call for Details and Pricing

MECHETEC® is a registered trademark of Polymer Industries

Distributed by:



Call: 1 (866) 437-7427

Email: info@polymershapes.com
www.polymershapes.com



Headquarters:

PO Box 32; 10526 AL Hwy 40
Henagar, AL 35978 USA
Ph: (256) 657-5197
Fax: (256) 657-5189
Toll Free: 1-877-POLYMER (765-9637)

Mechanical Division: Pisgah, AL
Ultrapoly Division: Tacoma, WA
Midwest Distribution: Bolingbrook, IL
West Coast Distribution: Salt Lake City, UT
Avalanche Liner Division: Oxford, WI