

Nylatrack® Polyamide Track Plates

No broken chains - no efficiency loss.




Picture courtesy of DEEPOCEAN

Less weight, less cost, more protection of the environment

Environmental protection and tracked vehicles are generally regarded as being compatible but the high ground pressure of the vehicle actually causes damage to the ground. This ground pressure, can be significantly reduced by using plastic track plates instead of the traditionally used steel plates.

Depending on the type, Quadrant's Nylatrack® track plates weigh less than 80% of comparable steel plates. The pressure on the soil is much lower so that vehicles equipped with Nylatrack® track plates can even work on soft ground or pavement with little or no adverse effects. Slopes of up to 40% can be managed by crawler dozers equipped with Nylatrack® track plates depending on the type of plate and the compression of the soil.

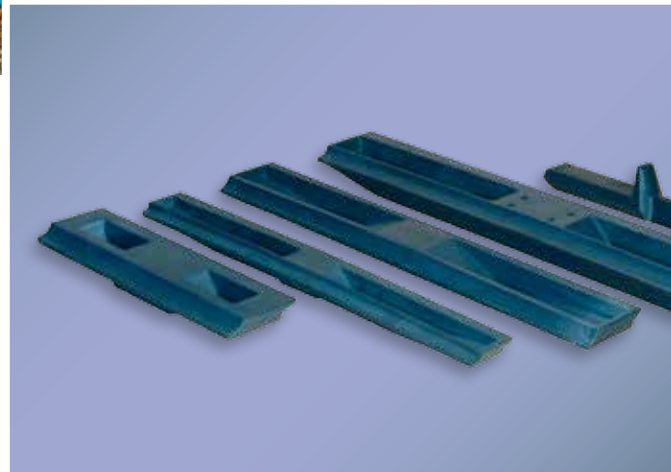

What are your benefits?

In addition to the reduced machine weight, noise reduction is another important benefit for the machine operator. The flexibility of the plastic plates helps absorb equipment vibrations and muffles the noise of the undercarriage. The drive chain is exposed to far less strain since the bending force is absorbed by the flexibility of the plastic track plates.

Important to know from a maintenance point of view: Nylatrack® track plates are highly resistant to wear and corrosion. Oils and seawater do not affect the plates. Their life in use is very long which extends the meantime between repair or replacement and helps save cost and save time.

Soil and macadam hardly stick to the Nylatrack® track plates which helps to prevent damage to the ground. Their overlap design ensures a clean track plate surface and avoids soil accumulation between the plates.

Distributed by:

 **Polymershapes**


QUADRANT
A Group Company of
 **MITSUBISHI CHEMICAL**

Key properties	Customer benefits
<ul style="list-style-type: none"> No damage of surface/ground 	<ul style="list-style-type: none"> Environmental protection
<ul style="list-style-type: none"> Low weight compared to steel 	<ul style="list-style-type: none"> Reduced machine weight = reduced fuel consumption and easy operation on marshy ground
<ul style="list-style-type: none"> Wear and corrosion resistant 	<ul style="list-style-type: none"> Long life in use saves cost and time
<ul style="list-style-type: none"> No adhesion 	<ul style="list-style-type: none"> Good grip, no cleaning effort
<ul style="list-style-type: none"> Flexible material 	<ul style="list-style-type: none"> Vibrations and noise absorption
<ul style="list-style-type: none"> Efficient production method 	<ul style="list-style-type: none"> Individual design possible, easy to machine

Various designs allow individual solutions

More than 25 standard types of track plates are available for various types of machines and surfaces. Standard Nylatrack® low ground-pressure plates:


- Track plate width: 600 mm up to 1750 mm width
- Pitches: 102 to 215 mm

The standard plates are designed for vehicles with a total weight of up to 30 tons (metric).

Bespoke design

Customer specific designs are possible on demand. Successful applications have been designed and supplied up to 160 tons and 3000 mm length.

Bending Test of Nylatrack® Track Plates

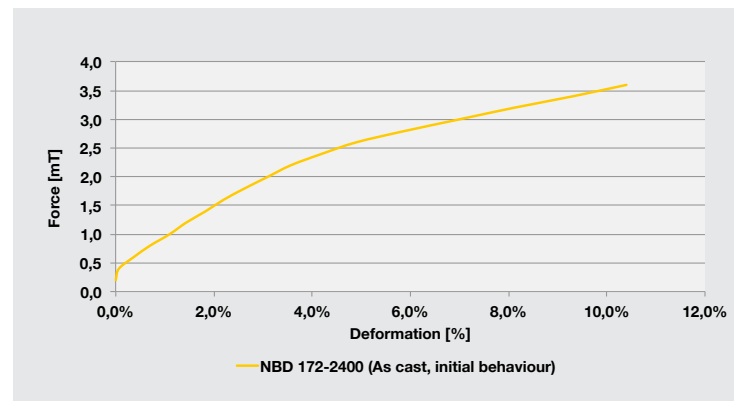

Please contact us for more details.

Quadrant Engineering Plastic Products

Distributed by:  **Polymershapes** Call: 1 (866) 437-7427
Email: info@polymershapes.com
www.polymershapes.com

This brochure and any data and specifications presented here or on our website shall provide promotional and general information about the Engineering Plastic Products (the „Products“) manufactured and offered by Quadrant Engineering Plastic Products („Quadrant“) and shall serve as a preliminary guide. All data and descriptions relating to the Products are of a general informational nature only. Neither this brochure nor any data and specifications presented on our website shall create or be implied to create any legal or contractual obligation. This brochure and any data or specifications herein do not create expressly or by implication any legal, contractual or warranty obligation whatsoever. No warranty of any kind, either express or implied, is made as to the information contained in these pages, including, but not limited to, all warranties provided for by Louisiana law, any implied warranty of merchantability, of fitness for a particular purpose, and any warranty against hidden defects or redhibitory defects or vices. No information in this brochure creates any express or implied warranty that the goods described here in shall conform to any description herein. Quadrant sells the products described herein solely to sophisticated users and not to consumers, and Quadrant assumes no responsibility that any goods described herein will be fit for any particular purpose for which a Quadrant customer may determine to purchase such goods, except and to the sole extent otherwise provided in a separate written contract.

Any illustration of the possible fields of application of the Products shall merely demonstrate the potential of these Products, but any such description does not constitute any kind of covenant or warranty whatsoever. Irrespective of any tests that Quadrant may have carried out with respect to any Product, Quadrant does not possess expertise in evaluating the suitability of its materials or Products for use in specific applications or products manufactured or offered by the customer respectively. It thus remains the customer's sole responsibility to test and assess the suitability and compatibility of Quadrant's Products for its intended applications, processes and uses, and to choose those Products that according to its assessment meet the requirements applicable to the specific use of the finished product. The customer undertakes all liability in respect of the application, processing or use of the aforementioned information or product, or any consequence thereof, and shall verify its quality and other properties.

Nylatrack® is a registered trademark of the Quadrant group.