





# EFFICIENCY+ CREATIVITY

LEXAN™ THERMOCLICK™ 40 AND 50 MM SHEET SYSTEMS

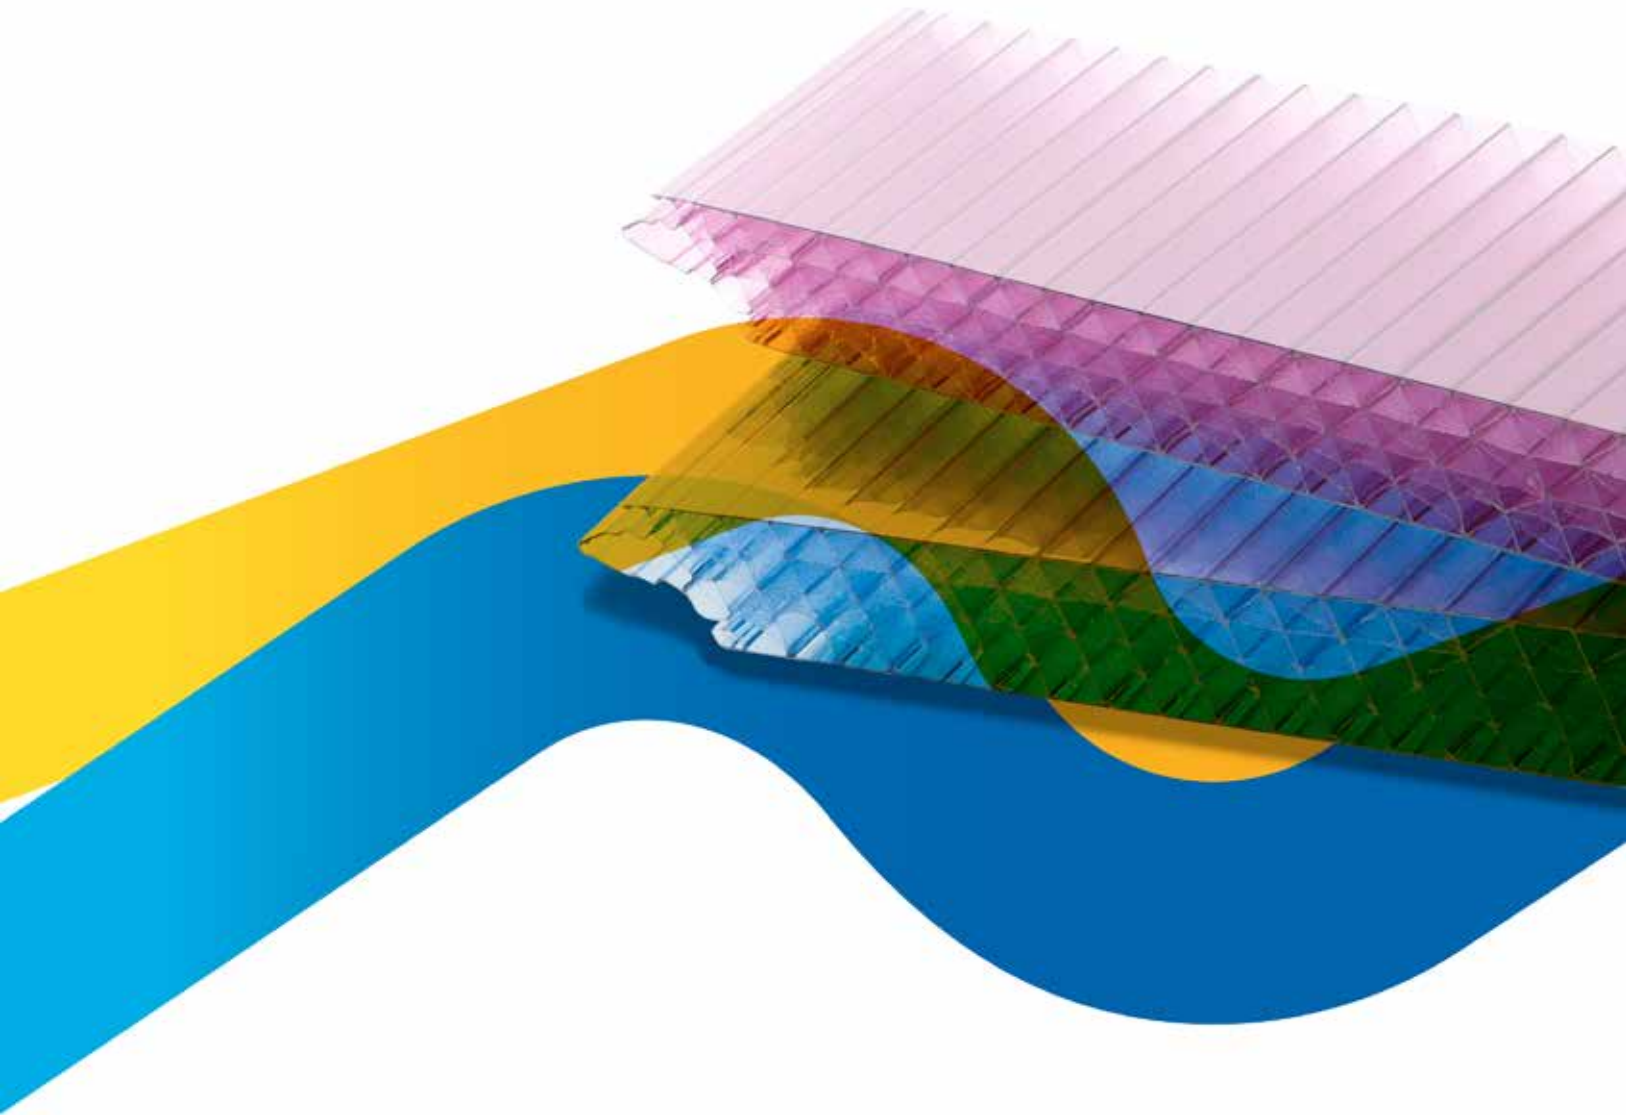

CHEMISTRY THAT MATTERS™

CLADDING AND FAÇADES HAVE AN IMPORTANT INFLUENCE ON THE CHARACTER OF A BUILDING. THE COST OF HEATING AND COOLING IS REACHING NEW LEVELS, CAUSING BUILDERS TO LOOK FOR NEW ALTERNATIVES TO INCREASE ENERGY EFFICIENCY.

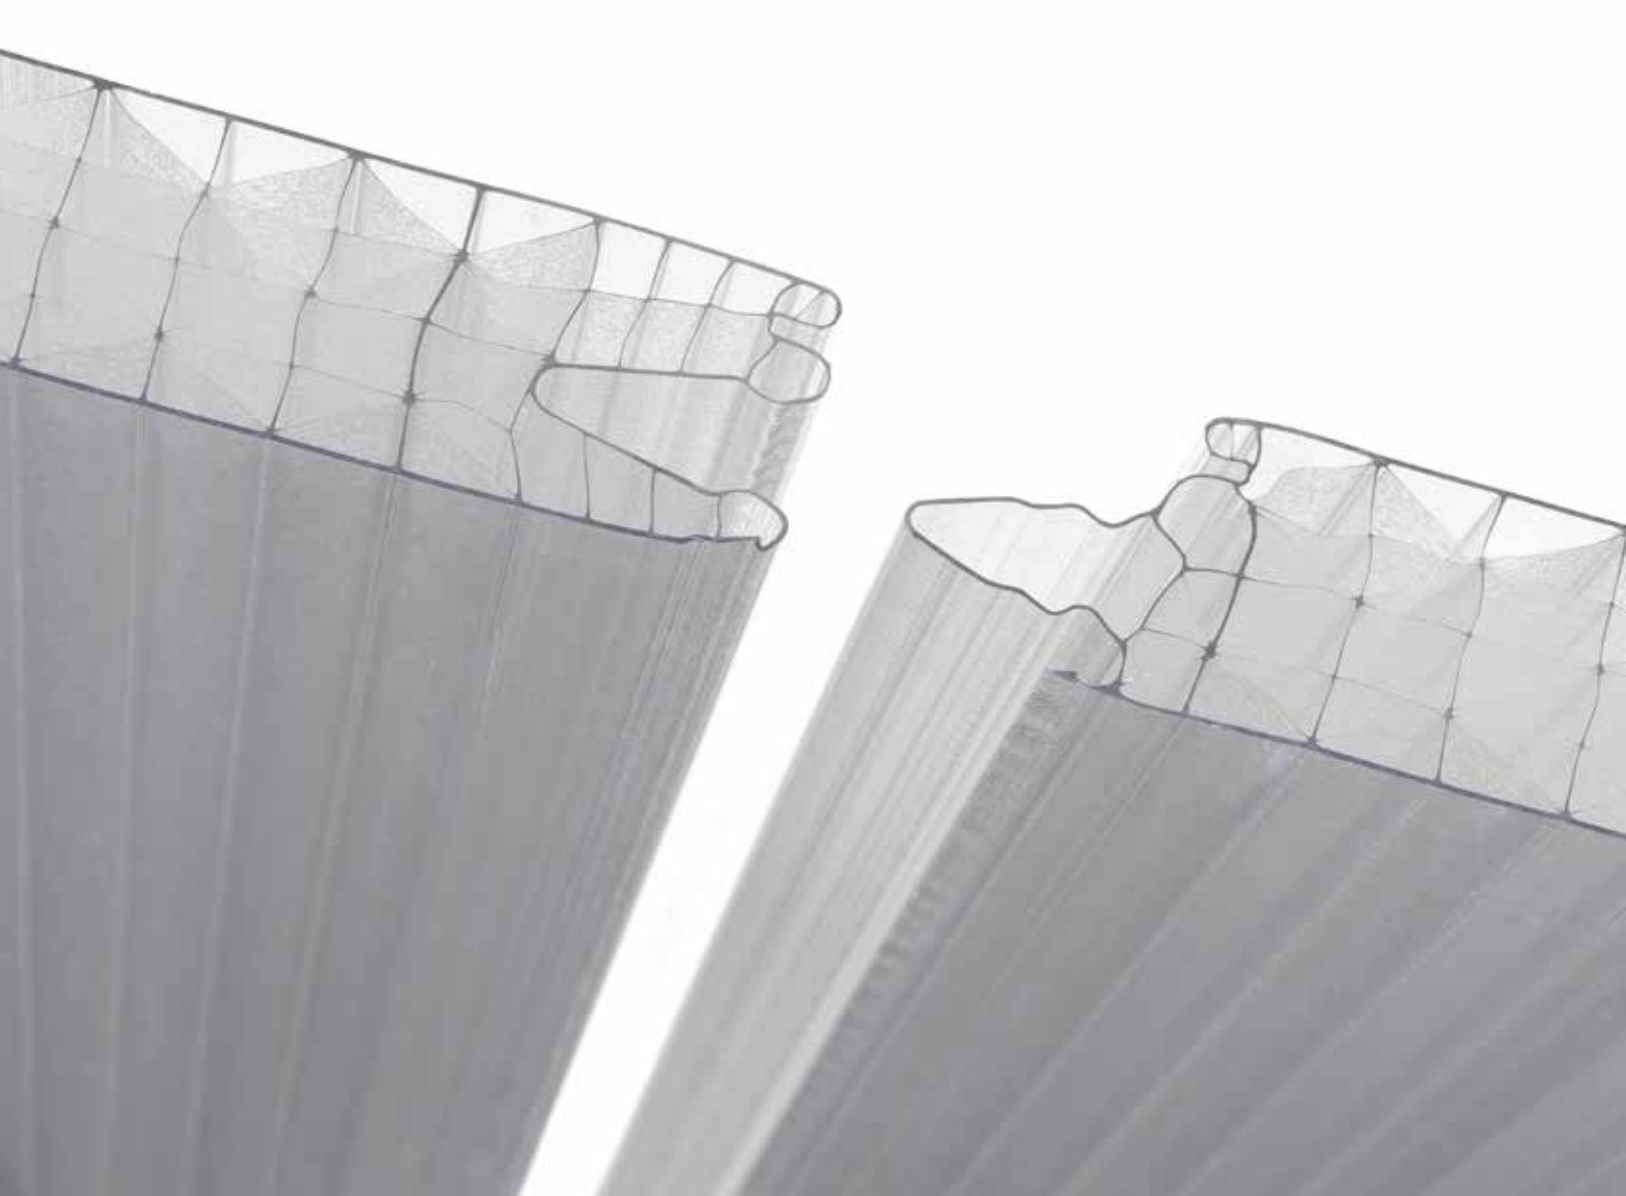

# INTRODUCTION

SABIC's Innovative Plastics business has developed two new LEXAN™ THERMOCLICK™ sheet systems in 40 and 50 mm thicknesses. These products are an excellent candidate for applications such as cladding and façades of residences, commercial buildings, shopping centers, office buildings, and factories. These new systems can not only help customers reduce heating and cooling costs, but also cut energy usage and CO<sub>2</sub> emissions to benefit the environment.



---

SABIC's high performance LEXAN THERMOCLICK sheet products can give the building and construction industry new ways to meet demands for increased energy efficiency in living and working environments. Also these new products allow designs that are visually striking and yet extremely practical.








---

Furthermore, the low maintenance end product can help to resist rust, rot or warp. Installation costs may be kept low as each product is designed using custom-made configurations for fast on-site assembly. A 10-year limited written warranty is given against loss of light transmission, discoloration and breakage.



---


Specifically for LEXAN THERMOCLICK 40 and 50 mm sheet, a new aluminum profile system with an especially designed cold bridge connection is developed . This new system prevents manifestation of condensation in the inside of the profile for partition walls, floor, ceiling and roofing.



# IMPROVED U-VALUE

## LEXAN™ THERMOCLICK™ SHEET IN 40 MM

With specially designed tongue and groove connection, LEXAN THERMOCLICK sheet in 40 mm thickness [LTC404X4000] offers high impact resistance and very high thermal insulation leading to energy saving. This inter-connecting system including a groove for double-sided tie on the inside eliminates the need for vertical profiles, thereby saving costs and enhancing aesthetics. Also improved fix-key section connection can provide better loading performance compared to previous design.

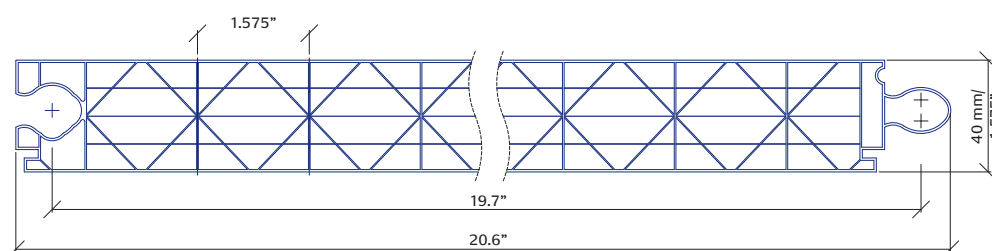

### LEXAN THERMOCLICK SHEET IN 40 MM [LTC404X4000] OFFERS

- Unique 5-wall with X-structure
- UV protected outer surface
- Good light transmission and light diffusion characteristics
- Improved-loading performance
- Excellent thermal insulation of 0.224 Btu/h ft<sup>2</sup> °F
- High impact strength
- 10-year limited written warranty against long-term weathering conditions
- Fast and easy installation
- Wide range of colors and aesthetic effects


Property Profile	Value	Test Method
Panel width ctc	19.68 in ±0.01"	
Standard length tolerance	-0", +0.79"	
Panel total thickness	1.57" ±0.031"	
Weight	0.82 lb/ft <sup>2</sup> ±5%	
Hail impact	diam. 0.79" v ≥ 69 ft/sec	TNO Test
Temperature resist.	-40 up to 212 °F	UL 746 BEN
R-Value	4.47 ft <sup>2</sup> °F h/Btu	ISO 10077 (EN673)
Fire classification	CC1	D635
	Class A	E84
Coeff. of linear thermal expansion	3.75 x 10 <sup>-5</sup> in/in °F	DIN 53752



# SUPERB INSULATION

## LEXAN™ THERMOCLICK™ SHEET IN 50 MM

The new 50 mm LEXAN THERMOCLICK sheet [LTC509X] is a unique, 9-wall product with a superb U-value of 0.176 Btu/h t2 °F leading to energy saving. This new product offers superior insulation properties vs. multi-pane glass, plus lightweight, extremely high impact resistance, stiffness and ultra violet (UV) protection. With specially designed V-joint connection profile, including a groove for double-sided tie on the inside, this inter-connecting system eliminates the need for vertical profiles, thereby saving costs and enhancing aesthetics.

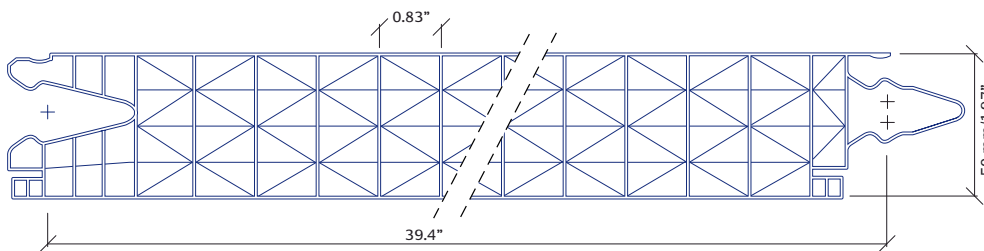

### LEXAN THERMOCLICK SHEET IN 50 MM (LTC509X) OFFERS

- Unique 9-wall with X-structure
- UV protected outer surface
- Good light transmission and light diffusion characteristics
- Extremely high stiffness
- Superb thermal insulation of 0.176 Btu/h t2 °F
- High impact strength
- 10-year limited written warranty against long-term weathering conditions
- Simple, easy and fast installation
- Wide range of colors and aesthetic effects

Property Profile	Value	Test Method
Panel width ctc	39.37 in ±0.01"	
Standard length tolerance	-0", +0.79"	
Panel total thickness	1.97" ±0.04"	
Weight	1.05 lb/ft2 ±5%	
Hail impact	diam. 0.79" v ≥ 69 ft/sec	TNO Test
Temperature resist.	-40 up to 212°F	UL 646 BEN
R-Value	5.68 ft2 °F h/Btu	ISO 10077
Coeff. of linear thermal expansion	3.75 x 10-5 in/in°F	DIN 53752

Distributed by



Call: 1 (866) 437-7427  
Email: [info@polymershapes.com](mailto:info@polymershapes.com)  
[www.polymershapes.com](http://www.polymershapes.com)



DISCLAIMER: THE MATERIALS, PRODUCTS AND SERVICES OF SAUDI BASIC INDUSTRIES CORPORATION (SABIC) OR ITS SUBSIDIARIES OR AFFILIATES ("SELLER") ARE SOLD SUBJECT TO SELLER'S STANDARD CONDITIONS OF SALE, WHICH ARE AVAILABLE UPON REQUEST. INFORMATION AND RECOMMENDATIONS CONTAINED IN THIS DOCUMENT ARE GIVEN IN GOOD FAITH. HOWEVER, SELLER MAKES NO EXPRESS OR IMPLIED REPRESENTATION, WARRANTY OR GUARANTEE (i) THAT ANY RESULTS DESCRIBED IN THIS DOCUMENT WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN OR APPLICATION INCORPORATING SELLER'S MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS. UNLESS OTHERWISE PROVIDED IN SELLER'S STANDARD CONDITIONS OF SALE, SELLER SHALL NOT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS, SERVICES OR RECOMMENDATIONS DESCRIBED IN THIS DOCUMENT. Each user is responsible for making its own determination as to the suitability of Seller's materials, products, services or recommendations for the user's particular use through appropriate end-use and other testing and analysis. Nothing in any document or oral statement shall be deemed to alter or waive any provision of Seller's Standard Conditions of Sale or this Disclaimer, unless it is specifically agreed to in a writing signed by Seller. Statements by Seller concerning a possible use of any material, product, service or design do not, are not intended to, and should not be construed to grant any license under any patent or other intellectual property right of Seller or as a recommendation for the use of any material, product, service or design in a manner that infringes any patent or other intellectual property right.

SABIC and brands marked with <sup>TM</sup> are trademarks of SABIC or its subsidiaries or affiliates.  
© 2014 Saudi Basic Industries Corporation (SABIC). All Rights Reserved.